


FIG.1

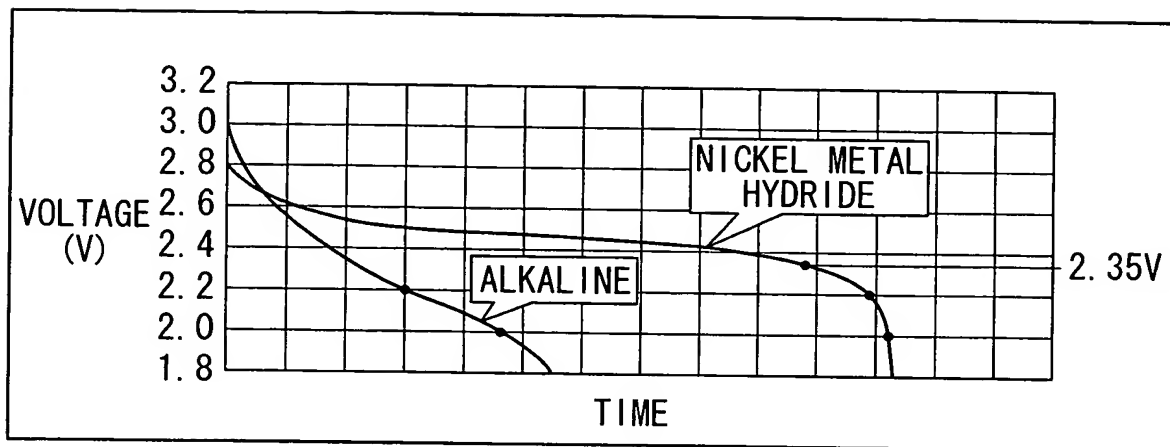

	BATTERY USE RATE (%)	
	ALKALINE BATTERY	NICKEL METAL HYDRIDE BATTERY
PRE-END VOLTAGE 2.2V	65%	96%
END VOLTAGE 2.0V	100%	100%

FIG.2

EXAMPLE OF WARNING DISPLAY

- ① NORMAL USED STATE
- ② SIGN AFTER DETECTION OF PRE-END VOLTAGE
- ③ SIGN AFTER DETECTION OF END VOLTAGE

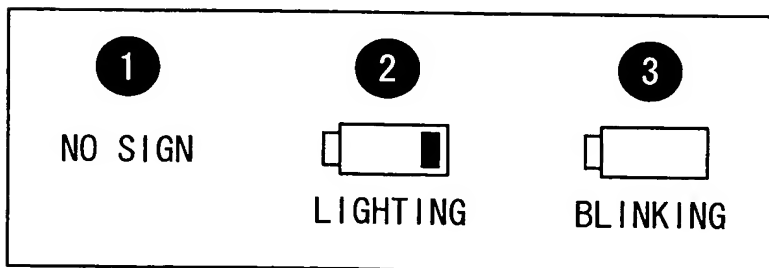


FIG.3

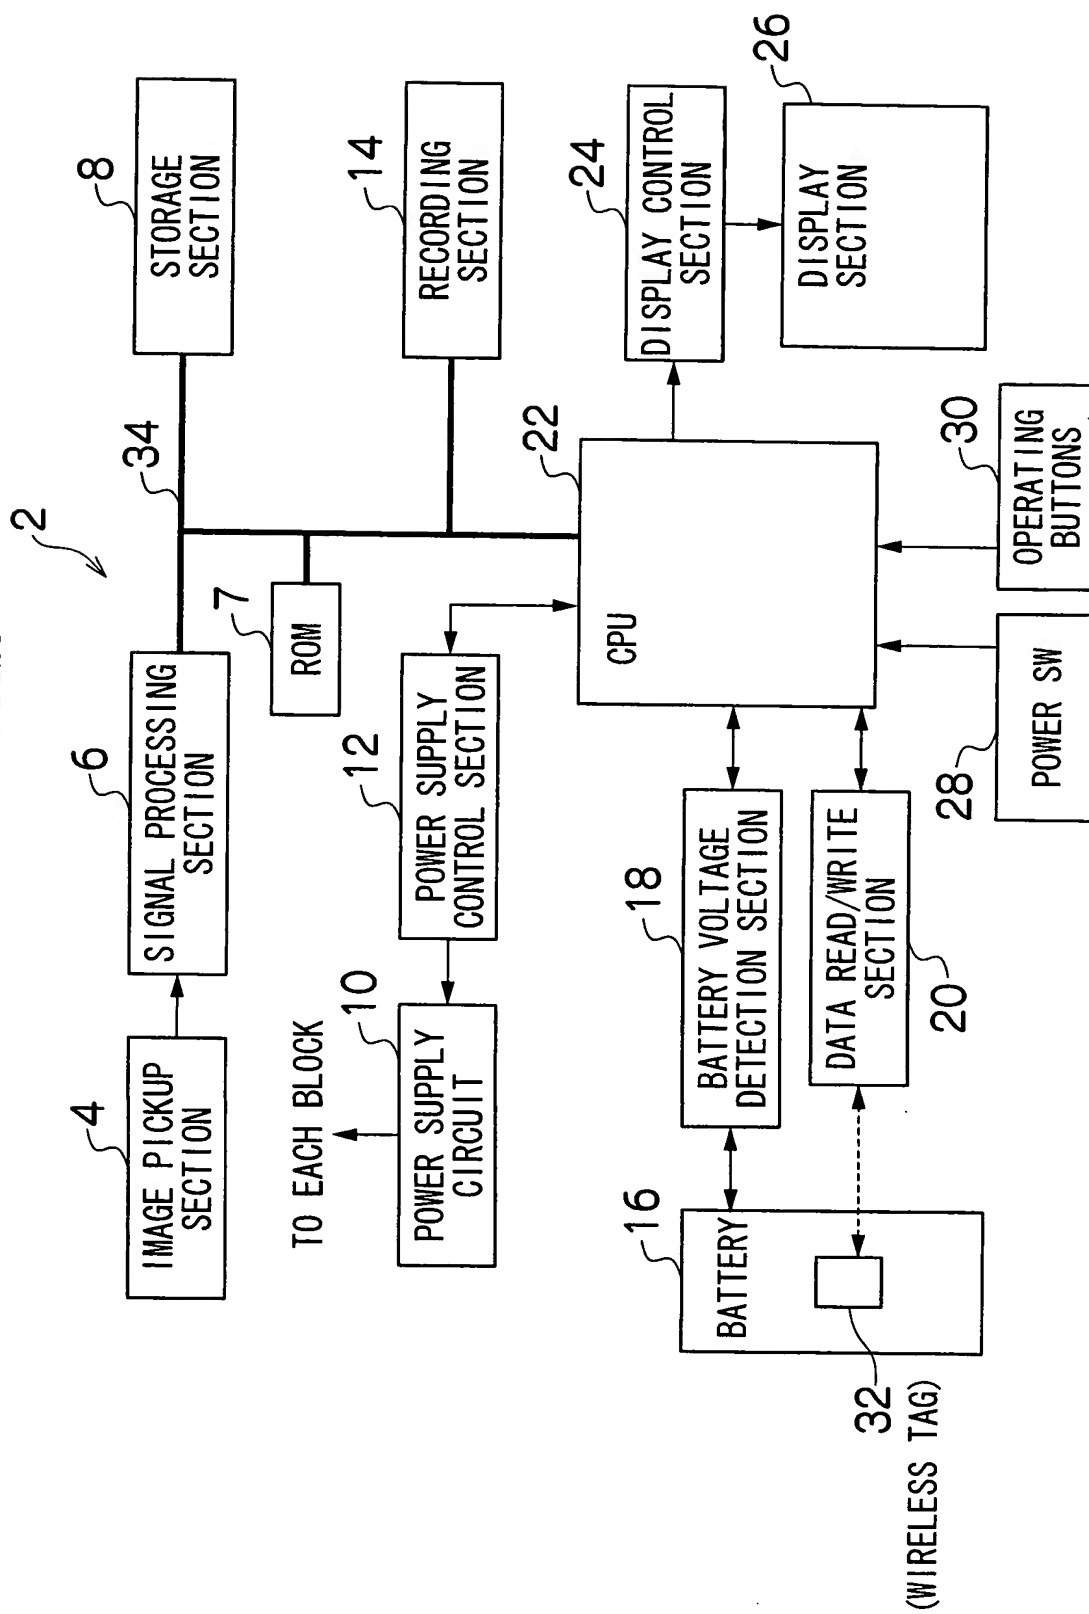


FIG.4

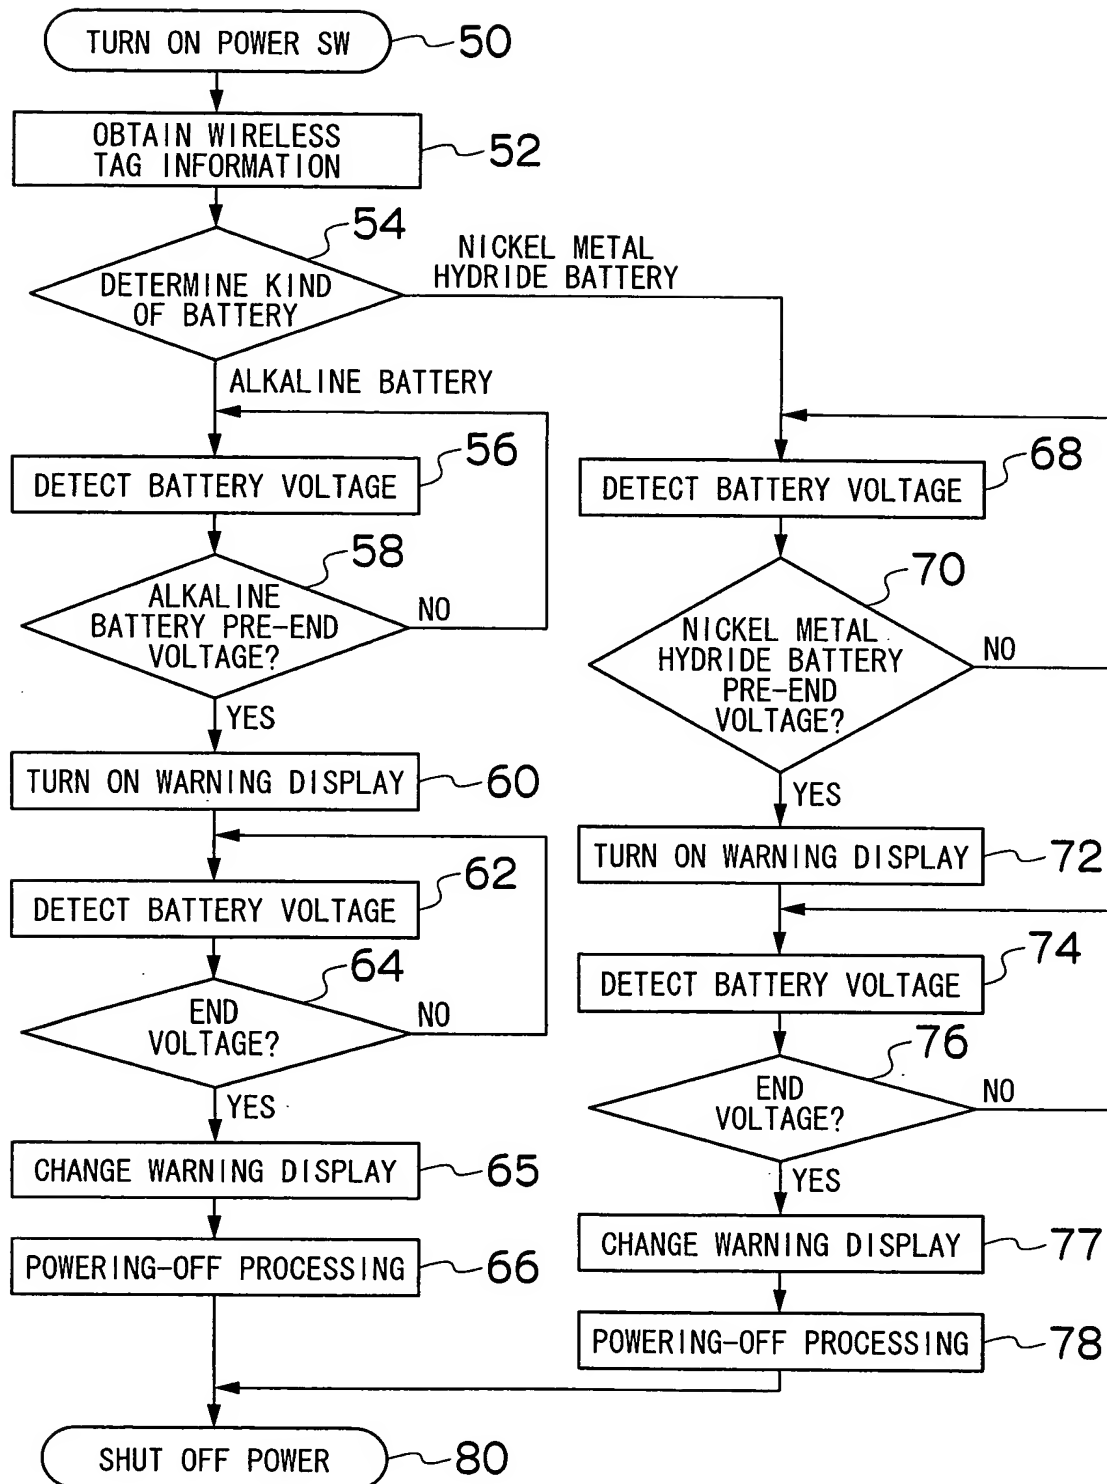


FIG.5

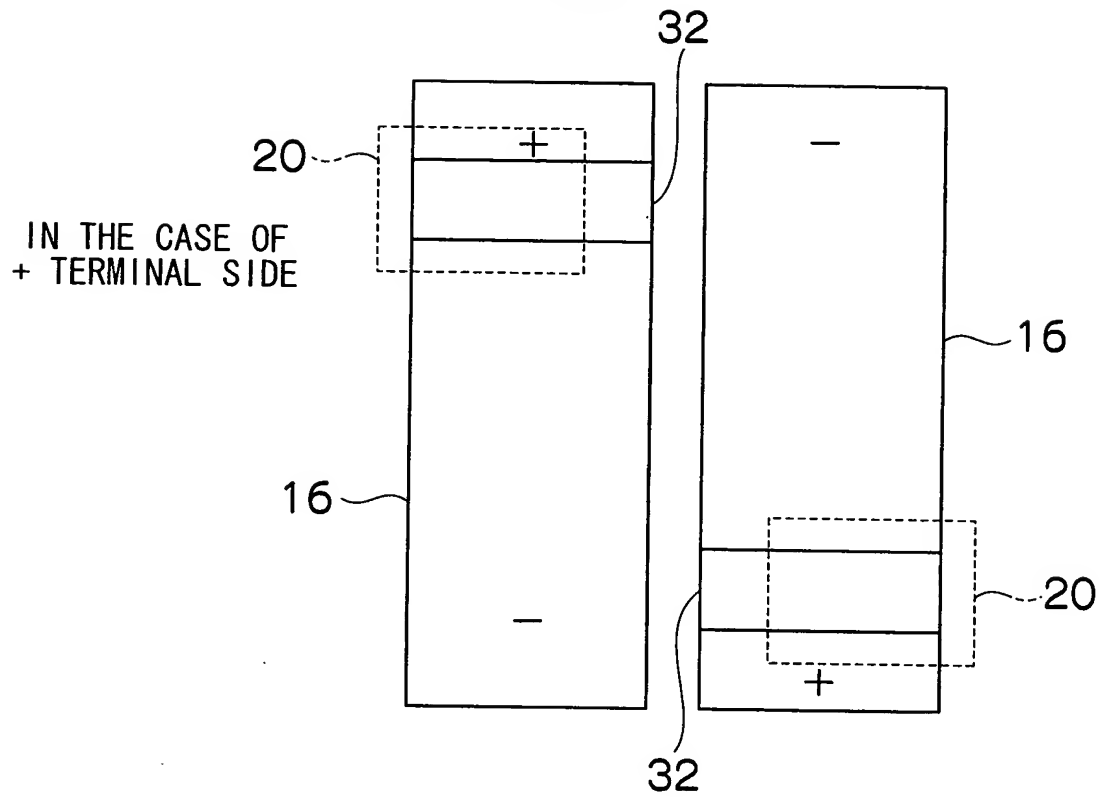
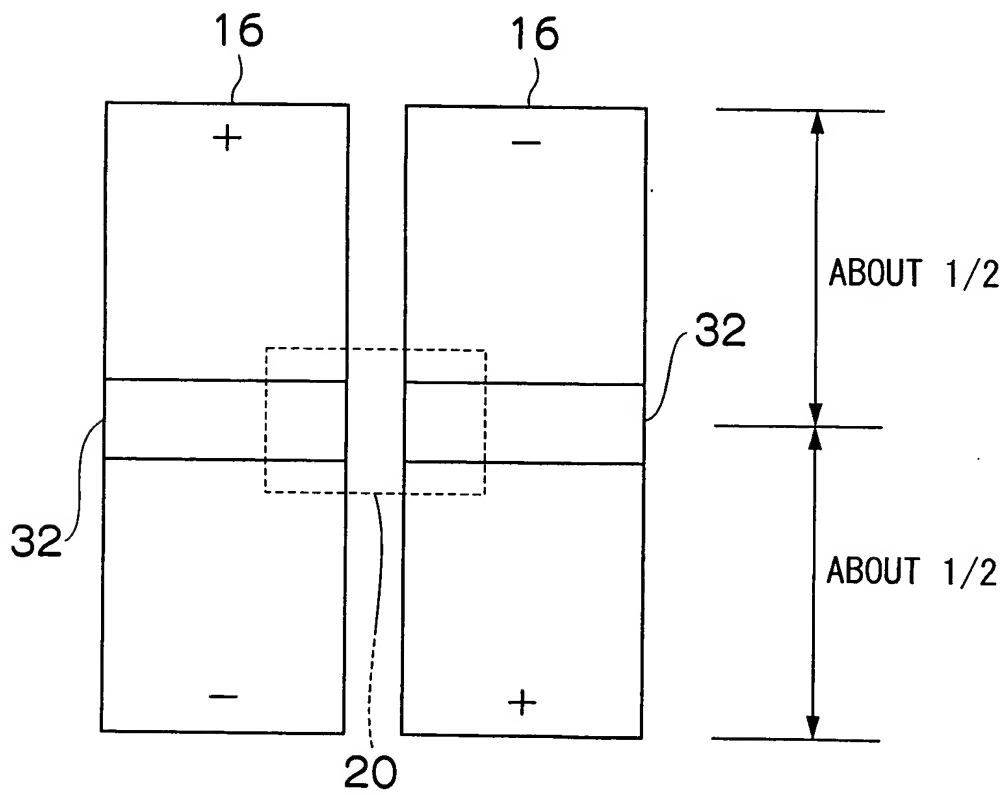


FIG.6



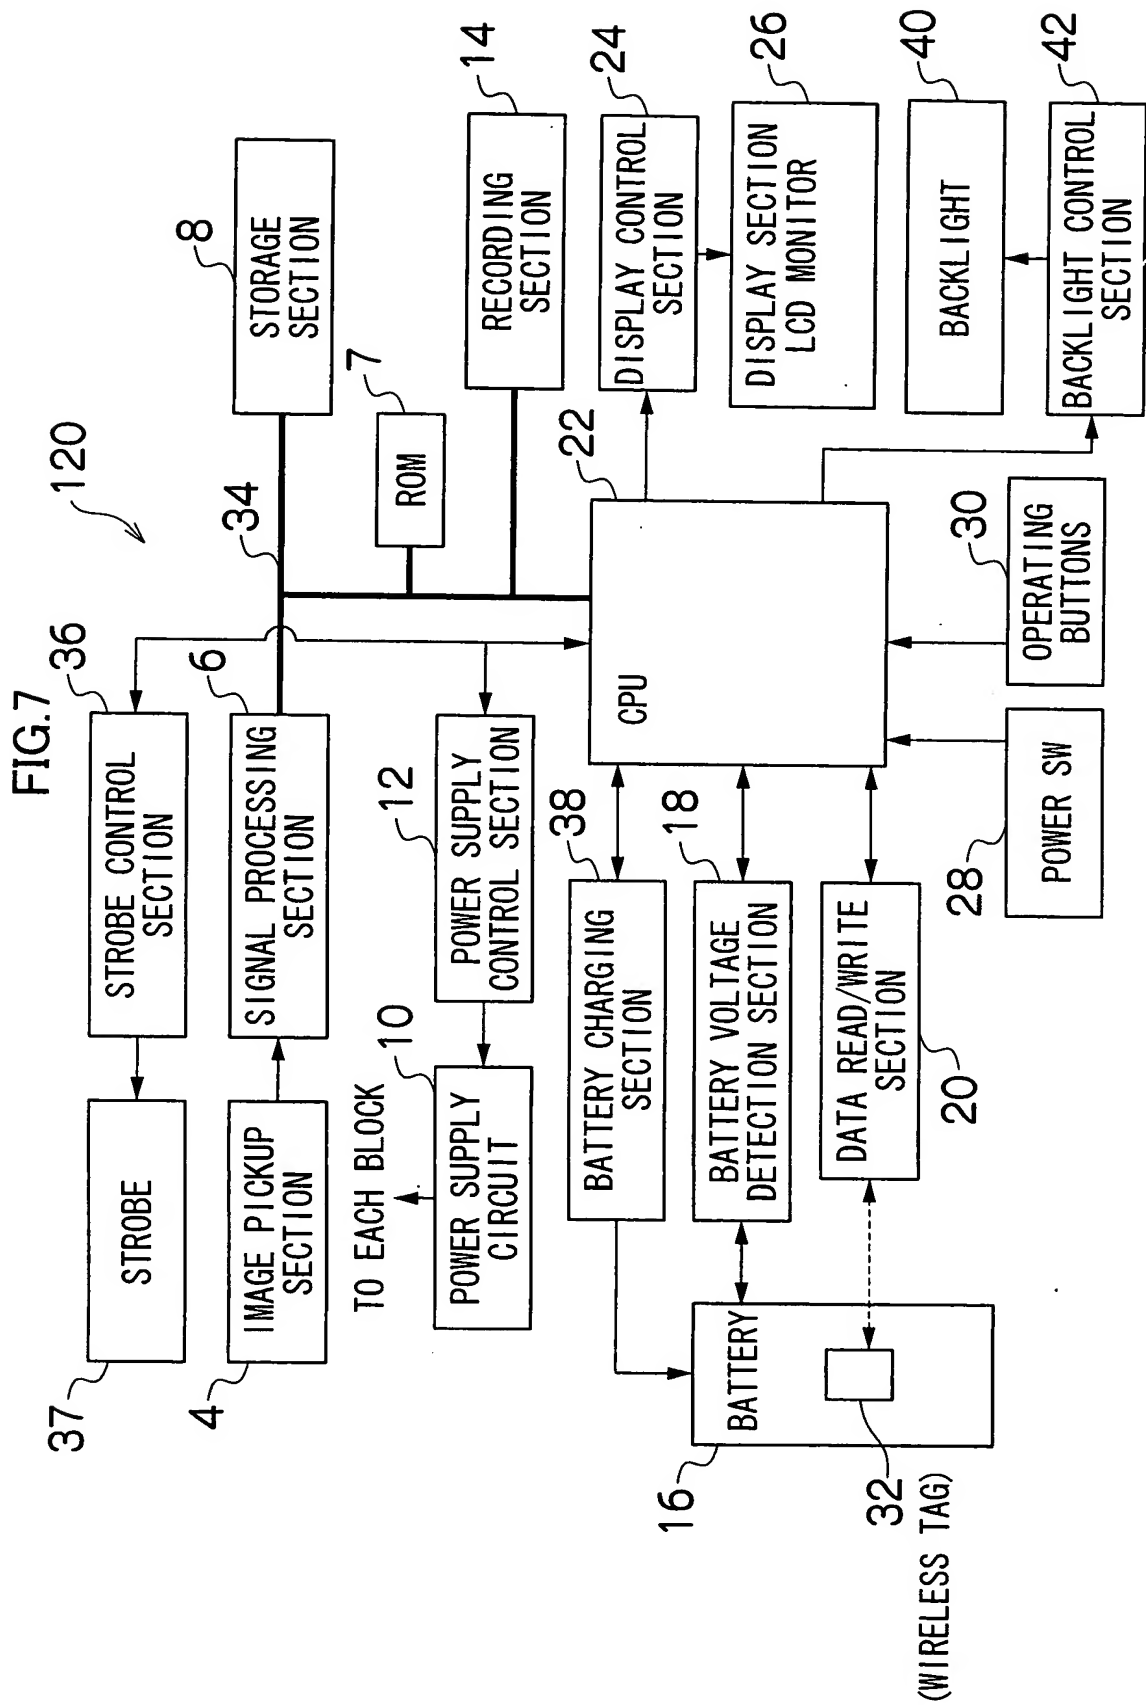


FIG.8

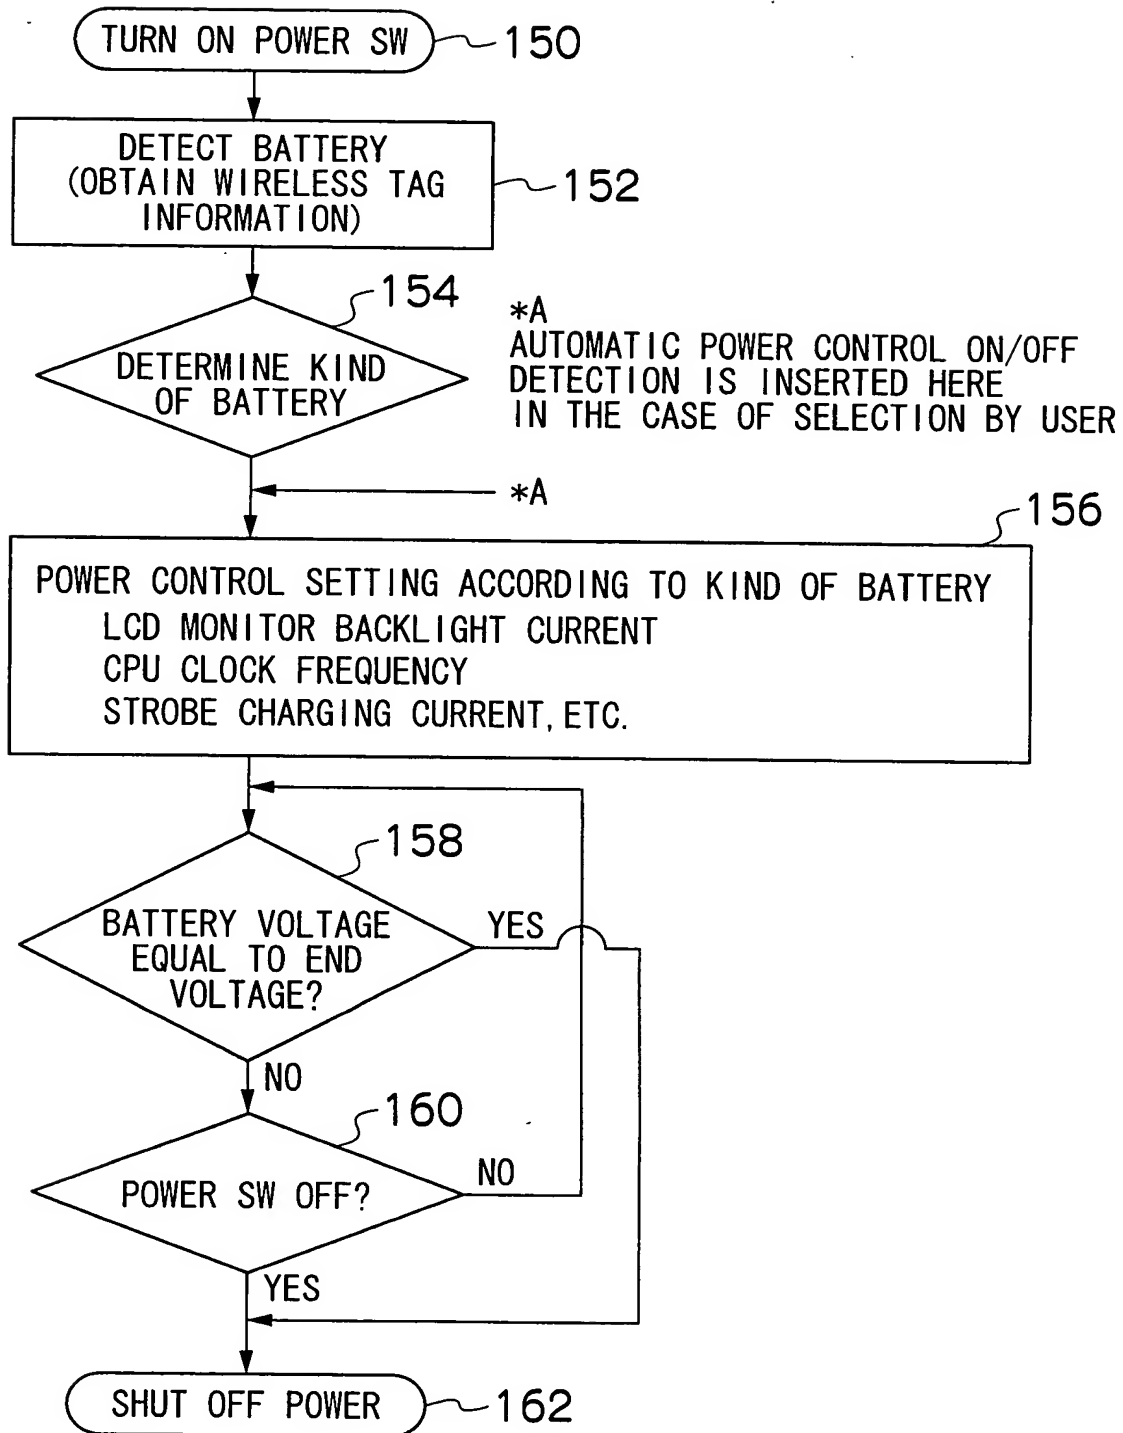


FIG.9

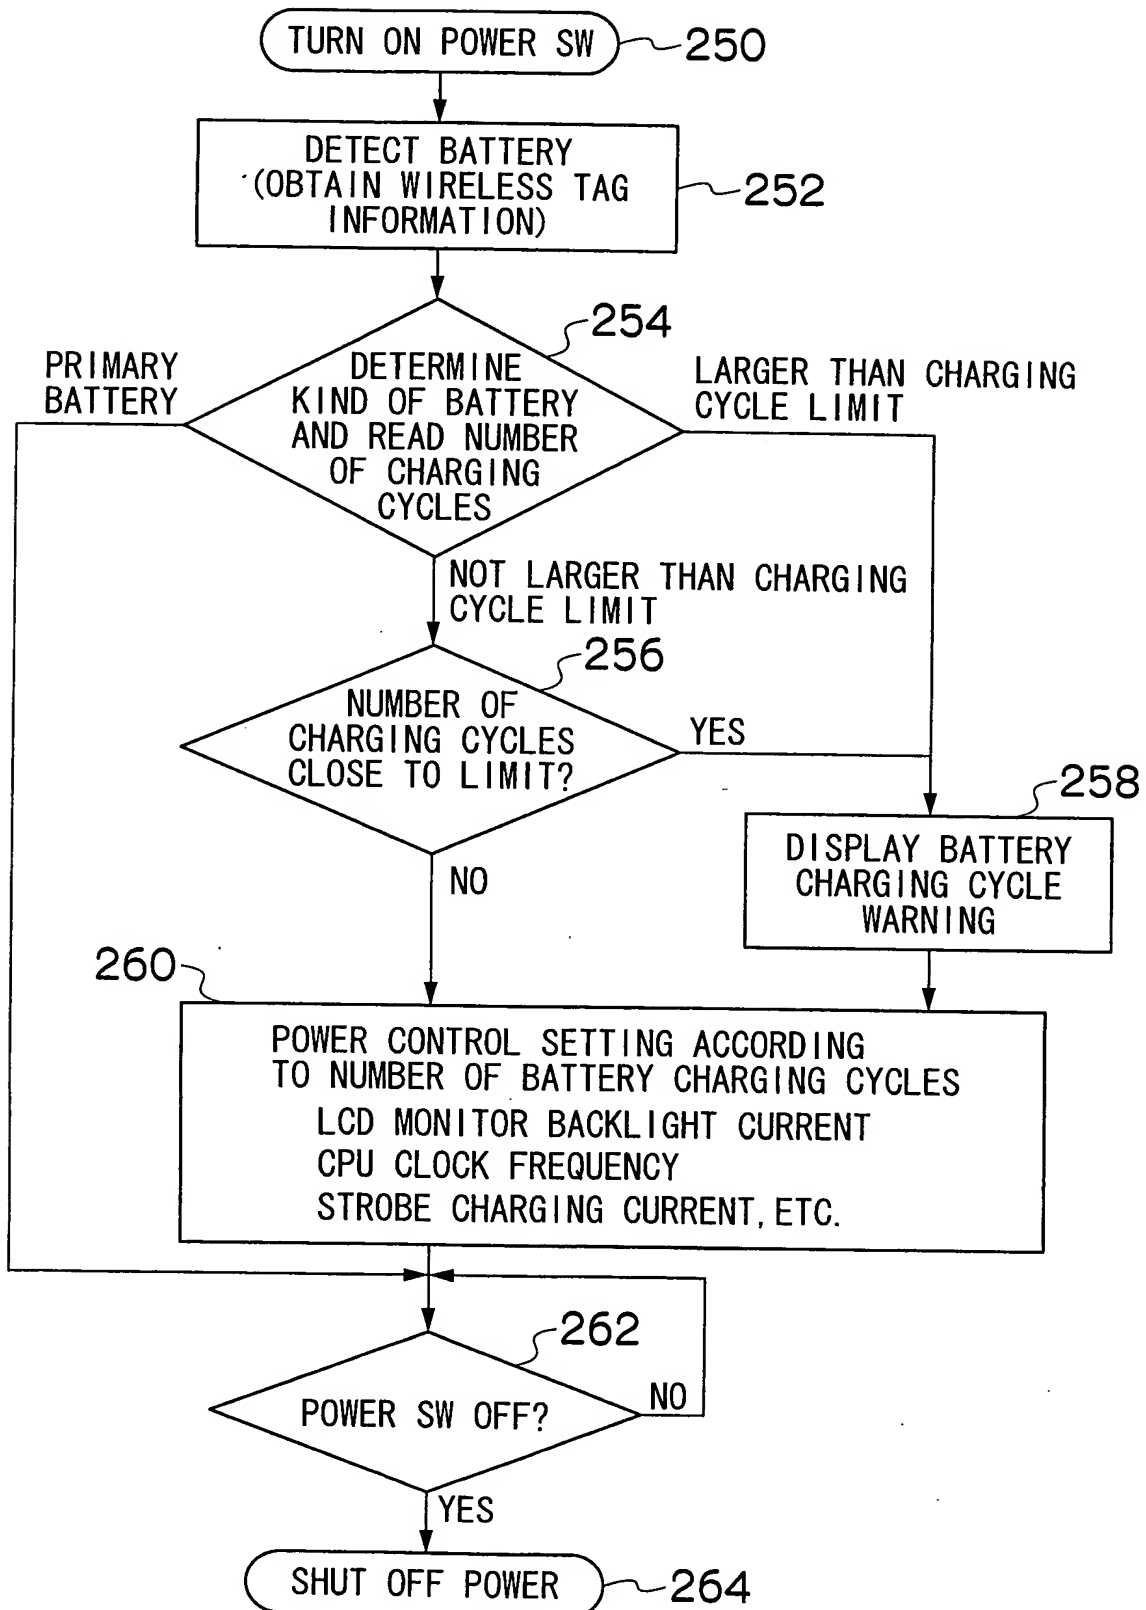


FIG.10A

NUMBER OF BATTERY CHARGING CYCLES
IS CLOSE TO LIMIT.

PREPARE NEW BATTERY

FIG.10B

NUMBER OF BATTERY CHARGING CYCLES
IS EXCEEDING LIMIT.

REPLACE BATTERY WITH NEW ONE RIGHT NOW